



Interchange Element Data Sheet

Data sheet created using the Parker Par Fit Toolkit software.

Creation Date: 05/09/2018

Datasheet No:


Parker Part No: 941887Q

OEM: Schroeder

OEM Part No: 18LZ10

ш	ro	~ I	110+	I Nim	nnc	INNC
г	ıu	u	ucı	UIII	CI 13	ions

A (mm)	98.8	(inch)	3.89
B (mm)	57.2	(inch)	2.25
C (mm)	57.2	(inch)	2.25
D (mm)	98.8	(inch)	3.89
E (mm)	469.9	(inch)	18.50

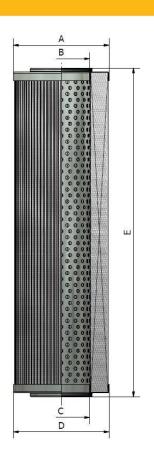



Construction Materials

Seal(s): FKM: Fluorocarbon

Top Endcap: Steel

Bottom Endcap: Steel

Inner Support Cylinder: Steel tin plated

Filter Media: Multilayer fiberglass with

epoxy coated mesh on both

sides

Calculated Performance Criteria

Differential Pressure (\Delta p): bar @ I/min **Tested to ISO3968 @ 32 cSt** psi @ gpm

Efficiency >Beta 200 @ 9 microns & greater >Beta 1000 @ 12 microns & greater

Minimum Collapse Pressure: >10 bar Tested to ISO2941 >150 psi

Dirt Holding Capacity acc. to ISO16889

